

# Speed Queen® Multi-Housing

## Manual Commercial Homestyle Single Load Dryer

Rear Control




### BUILT FOR RELIABLE PERFORMANCE

- Industry's largest door opening 2.06 sq. ft. (1914 cm<sup>2</sup>)
- Quiet, efficient blower system
- Door is reversible for installation flexibility
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26-7/8" (683 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder

### MANUAL CONTROL

- Multi-cycle timer knob
- Automatic dry cycles

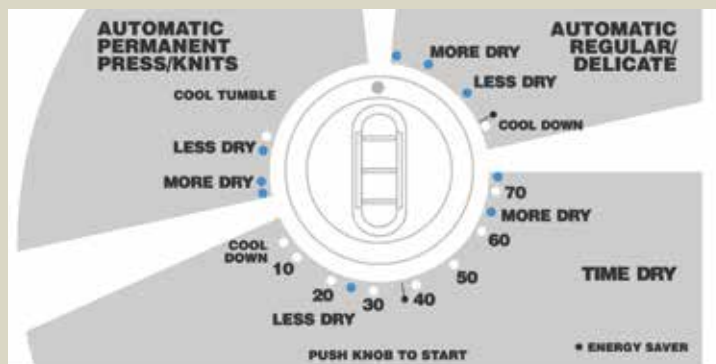


# MANUAL COMMERCIAL HOMESTYLE **SINGLE LOAD DRYER** SPECIFICATIONS

<b>MODELS</b>	Elec (208)	<b>LDE30RGS153TW01</b> <b>LDE30RGS173TW01</b> <b>LDG30RGS113TW01</b>
	Elec (240) Gas	
<b>Appearance</b>		
Color	White	
Control Panel Selection	Rear	
<b>Technical Info</b>		
Galvanized Cylinder Volume - cu. ft. (liters)	7.0 (198)	
Cycle Temperature - Automatic Permanent Press/Knits, Automatic Regular/Delicate, Time Dry		
Motor - HP	1/3 HP	
Weight - lb (kg)	Elec	130 (59)
	Gas	135 (61)
Shipping Weight - lb (kg)	Elec	140 (164)
	Gas	145 (166)
Electrical Requirements	Elec	208/60/1 30 amp 240/60/1 30 amp*
	Gas	120/60/1 15 amp
	Overall Dimensions WxDxH - in (mm): 26 7/8 (683) x 28 (711) x 43 (1092)	
Type Of Gas (Gas Models Only) Factory-Equipped Natural/Mixed Gas**		
Air Outlet Diameter - in (mm)	4 (102)	
Signal	Yes	
Efficient Dryer Heating	Elec	4750W, 208V 5350W, 240V
	Gas	25,000 Btu
<b>Performance/Features</b>		
Agency Approval	Elec	cULus
	Gas	cCSAUs

\* Electric dryers come equipped for 240/60/1 operation. They can be field converted to operate on 208/60/1 with optional 61928 conversion kit.  
 \*\* Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

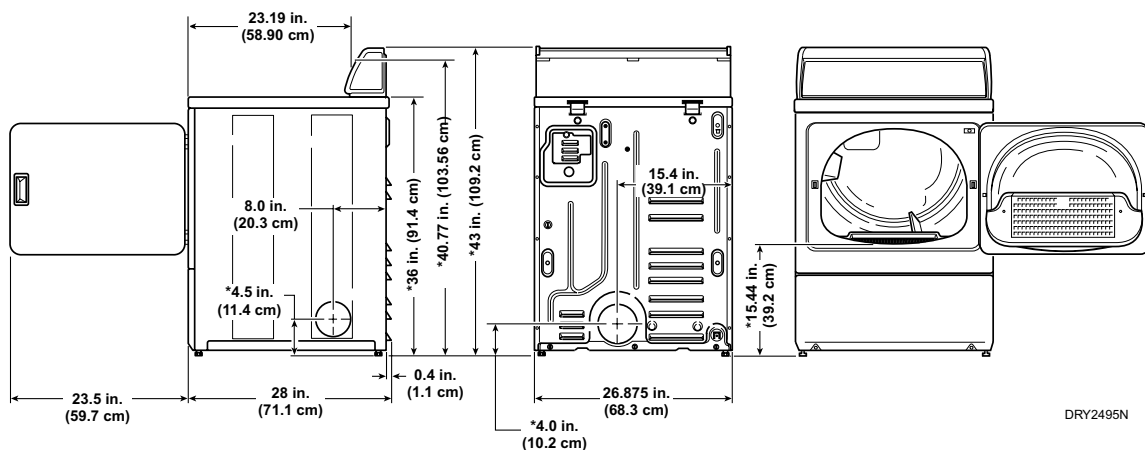

\* With leveling legs turned into base.  
 NOTE: Exhaust openings are 4 in. (10.2 cm) metal ducting.

DRY2495N

