

Speed Queen® Multi-Housing

Electronic Commercial Single Load Dryer

Front Control




BUILT FOR RELIABLE PERFORMANCE


- Industry's largest door opening 2.06 sq. ft. (1914 cm²)
- Quiet, efficient blower system
- ADA compliant
- Door is reversible for installation flexibility
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26-7/8" (683 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder

ELECTRONIC CONTROL

- Uses less energy
- Touch pad selection combines temperature and cycle
- Push to start activation
- Automatic moisture sensing

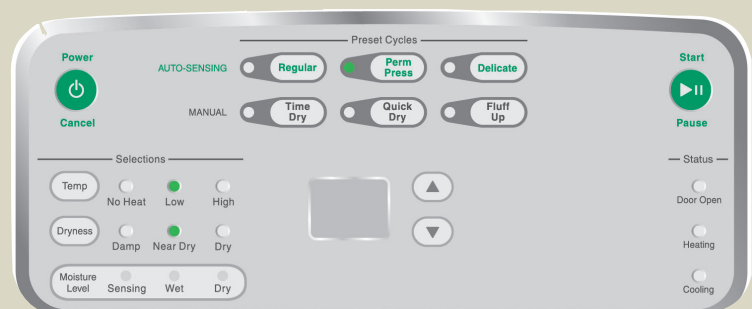


ELECTRONIC COMMERCIAL SINGLE LOAD DRYER SPECIFICATIONS

MODELS	Elec	LDEE5BGS153TW01
	Elec	LDEE5BGS173TW01
	Gas	LDGE5BGS113TW01
		
Appearance		
Color	White	
Control Panel Selection	Front	
Technical Info		
Galvanized Cylinder Volume - cu. ft. (liters)	7.0 (198)	
Cycle Temperature - Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up		
Motor - HP	1/3 HP	
Weight - lb (kg)	Elec	145 (66)
	Gas	150 (68)
Shipping Weight - lb (kg)	Elec	155 (70)
	Gas	155 (73)
Electrical Requirements	Elec	120/208/60/1 120/240/60/1*
	Gas	120/60/1
Overall Dimensions WxDxH - in (mm):	26 7/8 (683) x 28 (711) x 40 7/16 (1027)	
Type Of Gas (Gas Models Only) Factory-Equipped	Natural/Mixed Gas**	
Air Outlet Diameter - in (mm)	4 (102)	
Efficient Dryer Heating	Elec	4750W, 208V 5350W, 240V
	Gas	25,000 Btu
Performance/Features		
Agency Approval	Elec	cULus
	Gas	cCSAus

* Electric dryers come equipped for 120/240/60/1 operation. They can be field converted to operate on 120/208/60/1 with optional 61928 conversion kit.

** Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

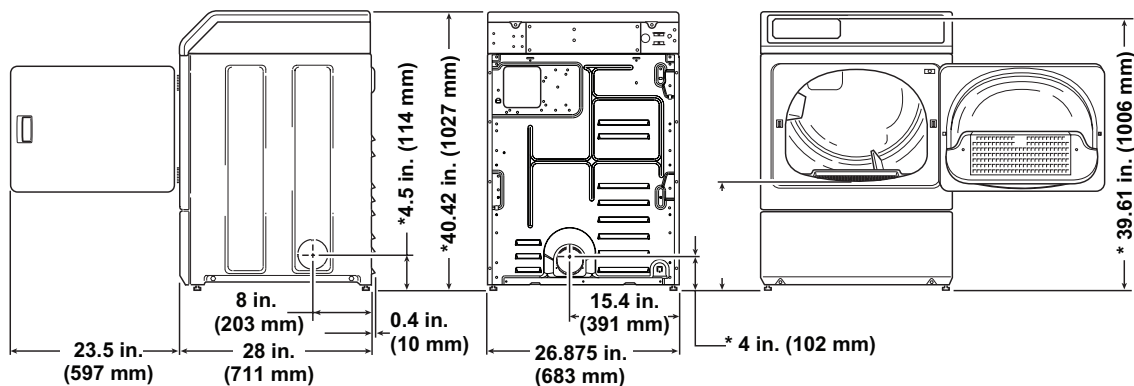

* With leveling legs turned into base.

NOTE: Exhaust openings are 102 mm (4 inch) metal ducting.

DRY2638N